

KERATOMETER



Keratometer SW-100

Measuring range: 6.5mm~9.5mm
Precision: $\pm 0.05\text{mm}$
Resolution of curvature radius of cornea: 0.01mm
Measurement deviation of the main meridian axial position: $\pm 2^\circ$
single measuring time: 0.03s
Output: wireless infrared thermal printer
Can observe the eye directly through the screen.
Weight: 0.5Kg(with batteries)
Dimension: 240mm \times 90mm \times 60mm
Power: 500mW+15%

K₁K₂

3D Platform Version:

Measuring range: curvature radius: 5.5mm-11mm, Diopter: 30D-61D

Precision: radius of curvature: $\pm 0.05\text{mm}$, Diopter: $\pm 0.25\text{D}$

Resolution of curvature radius: 0.01mm

Axial angle: 0-180°, Min degree 1°


The eyes can be directly observed by screen

Display Mode: Curvature radius and Diopter

Movement range of 3D platform:

X Axis: $\geq 100\text{mm}$, Y Axis: $\geq 24\text{mm}$

Y Axis: $\geq 115\text{mm}$

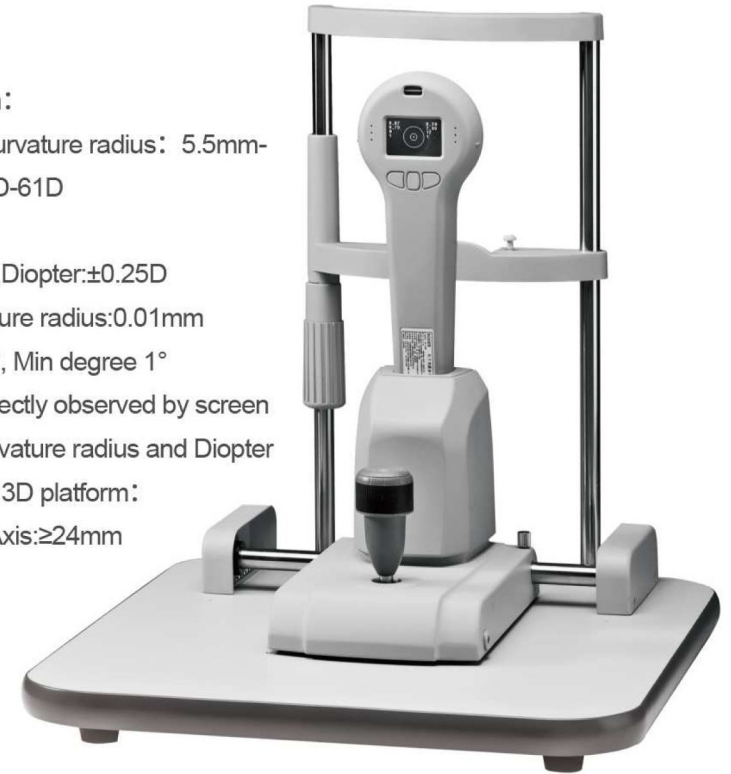

Keratometer SW-100 KERATOMETER

Electronic and optical integration, mainly used for measuring the corneal curvature radius and diopter, wireless data output.

